




Specification Sheet

Peart MasterView Linear

An exclusive mesh design with profiled beams for rigidity. Horizontal wires 6mm, vertical wires 4mm.

Peart MasterView Linear has a distinctive striped appearance created by the configuration of additional vertical wires. Not only does this feature make the panels more attractive, the additional wires create the most secure solution of these three products from the Peart MasterView range.

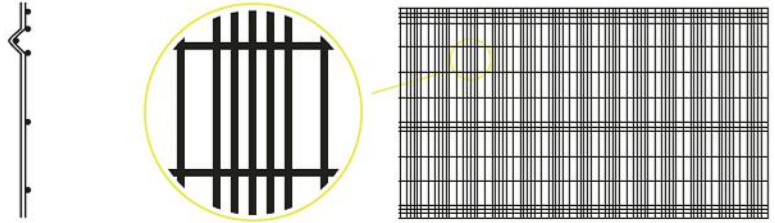

Peart MasterView Linear - Specification

MasterView Linear	1.8	2	2.4
Panel height - mm	1750	1950	2430
Panel width - mm		3064	
Mesh size - mm		200 x 50	
Horizontal wire Ø - mm		6	
Vertical wire Ø - mm		4	
Vertical wire spacings - mm (repeated 17 times over panel)	1@45;	4@22;	1@45
Panel weight - kg	28	30	37
Fixing clips	5	6	7
Profiles	3	3	4
Post length 60 x 60 x 3mm - m	2.5	2.7	3.1

Peart MasterView is a range of robust, attractive, easy to install mesh fencing systems with the strongest posts of any comparable system. Peart MasterView provides high-security solutions and maximum anti-corrosion protection.

The Peart MasterView systems are suitable for many locations including schools, industrial and commercial sites and parks, particularly where good visibility through the fence is required. Installation is straightforward and quick, and the finished installation is as secure as it is aesthetically pleasing.



Features	Benefits
Posts are 60 x 60 x 3mm SHS	Posts are the strongest posts of any comparable system
Posts are pre-drilled for standard stepping	Pre-drilled holes make it easy to step panels on sloping ground
Self-tapping fixing	No threaded inserts in posts which can spin making installation difficult
Magnetic fixing tool	Makes installation even easier
Wires protrude above top horizontal wire	Provides additional security Panel may be inverted if not required
Unique fastenings	Anti-vandal and tamper resistant, with nothing protruding from the back of the posts
A range of systems available	The design of the mesh panels means there is a solution for all fencing requirements
Manufactured in the UK	Extensive stocks are available for rapid despatch with crane offloading

Specifications are for guidance only and are subject to change without notice. Please check before ordering.